Anti-Burglary 19" Rack Cabinet
SA-ZNK series

An anti-burglary wall-mounted 19-inch rack cabinet designed to protect critical components of both active and passive telecommunications networks, as well as various types of electrical infrastructure components. This product line provides a high level of burglary resistance.

visualization of the closed anti-burglary cabinet SA-ZNK series

visualization of the open anti-burglary cabinet SA-ZNK series

features:

- designed for wall mounting in locations particularly vulnerable to vandalism or unauthorized access,
- rack solution allows the installation of devices adapted to the 19-inch standard,
- guarantees complete and effective protection of electrical installation components, controllers, and all types of control systems and equipment against external factors,
- protects against mechanical damage and acts of vandalism,
- the anti-burglary cabinet is equipped with a sliding cover secured by two T-13/8 shackle padlocks with identical key codes,
- offers additional protection by limiting access to unauthorized personnel,
- Magnelis® sheet is the only metallic coating certified for use in a C5 environment, which provides durability and protection against corrosion.

elements of equipment:

- 2x Barcz shackle padlocks, model T-13/8,
- mounting kit (4x wall anchors).

standards and certificates:

- flammability class V0 acc. UL 94,
- PN-EN 60529 - ingress protection degree IP 41,
- PN-EN 62262 - impact protection degree IK 10,
- REACH Regulation No 1907/2006/EC,
- RoHS 2011/65/UE.

The manufacturer reserves the right to make modifications and improvements to the product.
Therefore, the products shown in the illustrations and photographs may differ slightly from the actual state.

www.cabinex.pl

technical specifications:

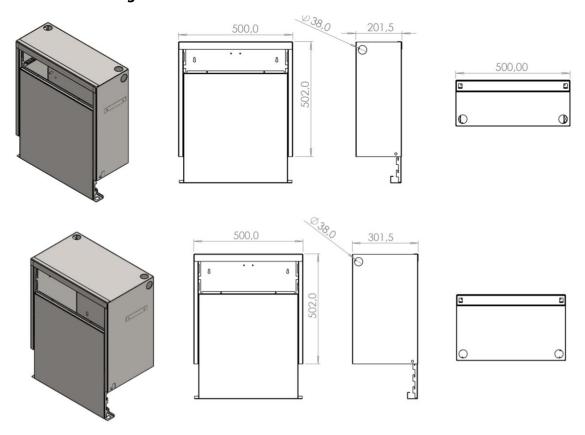| SA-ZNK-19"	3U	5U		
dimensions [width x height x depth][mm]	500 x 500 x 200	500 x 500 x 300	580 x 580 x 300	700 x 580 x 300
rack standard	19"			
rack unit height [U]	3	5		
telescopic rack rails	NO	YES		
type of cable entry	breakable cable slot / hole cap			
diameter of cable entry [mm]	ø 38mm			
number of cable entries	6 (2x top, 2x bottom, 1x side, 1x side)			
protection type	shackle padlocks model T-13/8			
mounting type	indoor, wall-mounted			
temperature resistance [°C]	from -40 to +70			
ingress protection degree IP	IP 41			
impact protection degree IK	IK 10			
flammability class	V0 acc. UL 94			
weight [kg]	~12.0	~14.5	~15.0	~19.0
material	powder painted Magnelis® sheet			
available colors	RAL7035			

Anti-Burglary 19" Rack Cabinet
SA-ZNK series

technical drawings:

order information:

CODE	DESCRIPTION
SA-500/500/200-ZNK-19"-S-3U-S-R7035	Anti-burglary 19" rack cabinet SA-500/500/200-ZNK, indoor, wall-mounted, padlock, static rack rails, 500x500x200mm (WxHxD), Magnelis®, structural, RAL7035
SA-500/500/300-ZNK-19"-W-5U-S-R7035	Anti-burglary 19" rack cabinet SA-500/500/300-ZNK, indoor, wall-mounted, padlock, telescopic rack rails, 500x500x300mm (WxHxD), Magnelis®, structural, RAL7035
SA-580/580/300-ZNK-19"-W-5U-S-R7035	Anti-burglary 19" rack cabinet SA-580/580/300-ZNK, indoor, wall-mounted, padlock, telescopic rack rails, 580x580x300mm (WxHxD), Magnelis®, structural, RAL7035
SA-700/580/300-ZNK-19"-W-5U-S-R7035	Anti-burglary 19" rack cabinet SA-700/580/300-ZNK, indoor, wall-mounted, padlock, telescopic rack rails, 700x580x300mm (WxHxD), Magnelis®, structural, RAL7035